

Preface	3
Emergency Rescue Manual Introduction.....	3
Electric and Hybrid Vehicle Identification.....	4
High Voltage Identification	5
High-voltage & Fuel System	9
High Voltage System and Fuel System Components.....	9
Emergency Rescue	11
Safety Instructions for Emergency Rescue	11
High Voltage Isolation.....	13
Vehicle on Fire.....	16
Waterlogged Vehicle.....	18
Cutting	19
Jacking Or Lifting	20
Vehicle Recovery after Accident.....	21
Parking Operations	23
Emergency Tailgate Opening Device.....	24

CONTENTS

Vehicle Data	25
Vehicle Information	25
Parameters of High Voltage Battery	26

Emergency Rescue Manual Introduction

Introduction

This manual is designed to be used by the emergency services. In the event of an accident or emergency the operator must have a complete understanding of high voltage systems and the health and safety protocols that are associated with them, ideally the operator should be trained and certificated in the safe handling and rescue of electric or hybrid vehicles that feature high voltage systems. In case of an emergency please give this document to the first responder.

This manual only provides specific information required to identify, locate and safely work around high voltage components in the event of an emergency. It includes important information and warnings that must be considered in emergencies. Please read this manual carefully and follow the relevant safety procedures and precautions precisely.

The illustrations used in this publication and the Owner's Handbook are for reference only.

Vehicle Manufacturer Information

For roadside assistance please contact the approved service provider – see website for details: <https://mg.co.uk/owners/service-and-roadside-assistance/>

For first and second responders, please consult the nearest MG Authorised Repairer for assistance – see website for details: <https://mg.co.uk/dealers/>

For consumer EV enquiries, please contact the MG call centre: 020 3917 5821

PREFACE

Electric and Hybrid Vehicle Identification

Electric or Hybrid vehicles can be recognised easily by logo's or badges placed in these locations:



High Voltage Identification



Always observe the instructions and requirements outlined on the warning labels associated with the high voltage system. Not all high pressure components are labeled. Wear complete insulation protection equipment at all times during rescue.

Generally high voltage systems and components that may be hazardous will carry identification, in general DO NOT touch any orange coloured components, any orange wires or anything featuring high voltage warning labels without permission or prior knowledge of high voltage systems and isolation procedures. The following are examples of high voltage warnings, components and safety labels:


PREFACE

High Voltage Mark	High Voltage Harness	High Voltage Connector	High Voltage Label	Manual Service Disconnect
				
<p>High voltage warning sign, indicating that the corresponding components contain high voltage.</p>	<p>High voltage wiring is orange in colour, this denotes that the wiring carries high voltage.</p>	<p>High voltage connections are orange in colour, this denotes that any power passing through this connector and any component that features orange connectors is high voltage.</p>	<p>High voltage labels are located on high voltage components. Please observe and follow any safety information on the label.</p>	<p>The Manual Service Disconnect device is orange in colour. Please ensure this connector is removed and therefore isolating the high voltage system prior to working on the high voltage component or system.</p>

Note: *Depending on the market in which the vehicle is sold and the date of manufacture, the label may have been translated and is displayed in a different language.*

HIGH-VOLTAGE & FUEL SYSTEM

High Voltage System and Fuel System Components

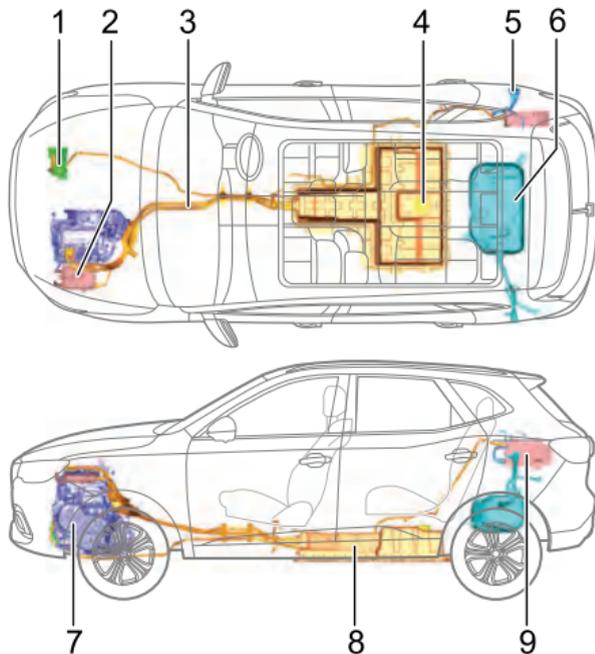

- 1 Electric air conditioning compressor
- 2 DC/DC converter
- 3 High voltage Harness
- 4 Manual Service Disconnect (MSD)
- 5 Slow charging socket
- 6 Fuel tank
- 7 Electric drive unit
- 8 High voltage battery pack
- 9 On board charger

Safety Instructions for Emergency Rescue



- During rescue, please observe the safety precautions associated with high voltage power. In all cases, priority must be given to the safety of personnel.
- Any components that feature high voltage warning labels or are orange in colour will feature high voltage electricity. Always observe any safety instructions displayed on any warning labels.
- If it is necessary to operate any high voltage components, it must be carried out by qualified personnel, supported by suitable insulated clothing, insulated protection equipment and only using insulated tools.
- If it is necessary to work with or around high voltage components, the high voltage isolation operation **MUST** be carried out in strict accordance with the "High Voltage Isolation" operation instructions outlined in this manual, any subsequent operations must be carried out observing all safety criteria.
- When lifting the vehicle using the underside, pay particular attention so as not to damage the high voltage battery pack. When using rescue tools, pay close attention to ensure that the floor is not damaged.
- Take care at all times when working with or around high voltage components, regardless of the operation, cutting, squeezing or touching high voltage components can cause serious injury or even death.

EMERGENCY RESCUE

Protective Equipment

Where it is necessary to operate or work with high voltage components it should be carried out by qualified personnel. Any operations should only be carried out using the correct personal protective equipment and insulated tools.

Insulation protection equipment and insulation tools	Example
Insulated gloves, withstand voltages up to 1 kV	
Insulated shoes, withstand voltages up to 18 kV	

Insulated tools, withstand voltages up to 1 kV



Insulation pad, withstand voltages up to 10KV




High Voltage Isolation

In cases where the vehicle power system can be shut down normally the high voltage system can be isolated by rescue personnel by disconnecting the 12V low voltage battery negative cable.

In cases of emergency, the high voltage system can be isolated by removing the manual service disconnect device (master safety device) or by cutting the low voltage harness in the front compartment.

Disconnect 12V Low Voltage Battery

- 1 Open the tailgate, raise the trunk carpet.
- 2 Disconnect or cut the 12V battery negative cable.

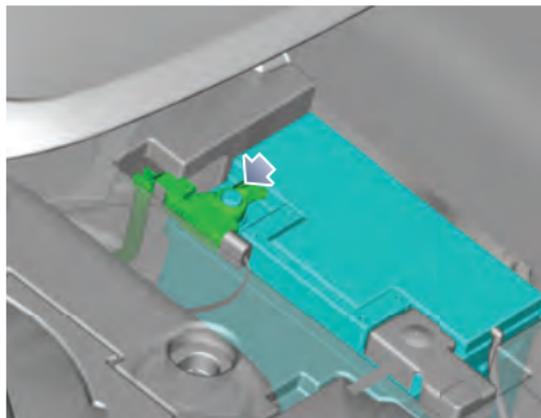

Note: After the high voltage system has been isolated it is necessary to wait at least 1 minute before working on any high voltage component or system to allow for high voltage electrical discharge within the system.


Manual Service Disconnect Removal

Where it is necessary to operate or work with high voltage components it should be carried out by qualified personnel. Any operations should only be carried out using the correct insulated personal protective equipment and insulated tools.

- 1 Remove rear seat cushion.


EMERGENCY RESCUE

- 2 Tear open the 'pre-cut' service port access point and remove the cover of the manual service disconnect.

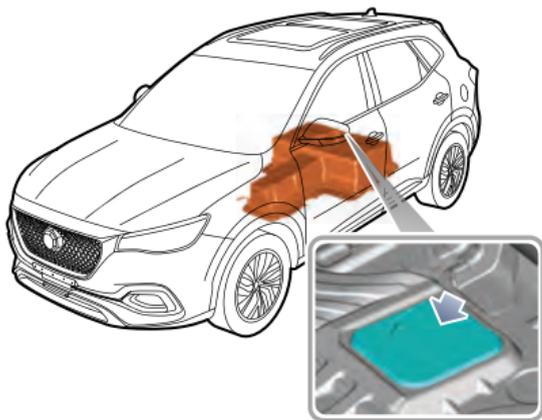

- 3 Remove the manual service disconnect as shown below and store it in a safe place.
- Press the lock buckle of the manual service disconnect and pull the release lever upward to release the first lock (figure 1).
 - Continue to raise the release lever to the secondary lock (approximately 45°), press the lock buckle of the manual service disconnect to release the secondary lock (figure 2).

- Continue to raise the release lever to the upright position (approximately 90°, figure 3).
- Pull up to remove the manual service disconnect (figure 4).

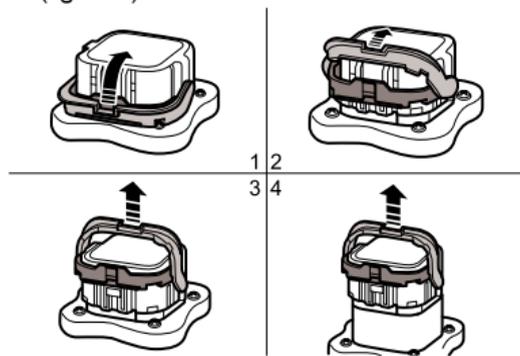


Note: After the manual service disconnect has been removed, please cover the open connector to prevent ingress of any debris or contaminants.

Note: If rescue site conditions do not allow the disconnection of the manual service disconnect, rescue personnel **MUST** disconnect the 12V battery and use the appropriate insulated personal protective equipment and tooling prior to commencing any rescue work.

Cut off the Front Compartment Low Voltage Harness

- 1 Open the bonnet.
- 2 Disconnect the high voltage system by cutting the front compartment low voltage harness (as shown in the figure).

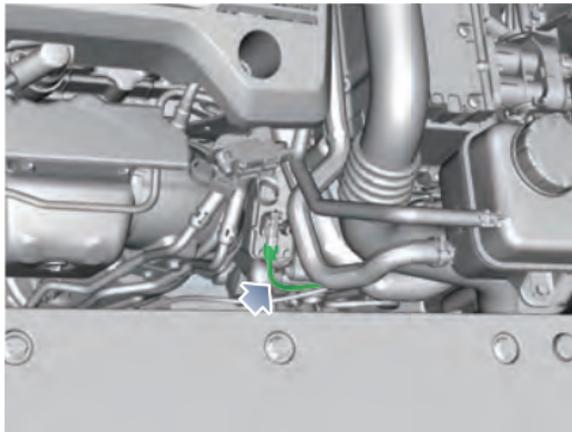

IMPORTANT

Prior to disassembly of any high-voltage system components, you **MUST** confirm whether the high-voltage circuit voltage is within the safe range (the effective voltage value is no more than 30V (AC) and no more than 60V (DC)) with special equipment (voltmeter, etc.) first and then take appropriate actions.

EMERGENCY RESCUE

Vehicle on Fire



In cases of rescue during vehicle fire, always wear complete personal protective equipment, including self-contained breathing apparatus (SCBA).

During cases of rescue when the vehicle is on fire, rescue personnel must use the correct insulated personal protective equipment and insulated tools.

- The driver, passengers and irrelevant personnel must be evacuated from the vehicle immediately.
- During the rescue process avoid touching the metal charged conductor of the damaged high-voltage parts to prevent possible electric shock injury.
- Do not contact any high-voltage components when extinguishing the fire, always use insulated tools for disposal. Disconnect the high-voltage output immediately when conditions permit.
- In cases of small fires where the flames do not spread to the high voltage battery pack, carbon dioxide or ABC dry powder fire extinguisher can be used.
- If the high-voltage battery pack is on fire, a large amount of water can be used to spray it continuously to reduce

the temperature of the high-voltage battery pack. (If no one is trapped and the rescue conditions permit, the rescue personnel can choose to let it burn out. At the same time, ensure that the fire does not spread and avoid inhalation of toxic substances in the smoke.)

- High voltage batteries that burn or get hot release toxic gases. Emergency personnel must always use complete personal protective equipment (including SCBA) to protect themselves, and take appropriate measures to guide smoke and gas, so as to protect the surrounding people from accidents.
- There are a large number of chemicals in the battery, so there is a risk of reignition. During the process of complete extinguishing it is recommended to use thermal imager, thermometer and other equipment to monitor the battery temperature in real time. If the temperature of the battery increases sharply, or there is excessive smoke emission, it is recommended that the water spray is directed straight onto the high voltage battery in order to cool and control the temperature.
- After the fire is completely extinguished, the damaged vehicle should be transferred to a safe place for isolation immediately. When transferring the vehicle, it is not

permitted to tow the vehicle, a suitable transporter must be used for transportation.

- If the high-voltage battery pack and high-voltage components are damaged, there may be a small amount of liquid leakage, such as lithium battery electrolyte and coolant. DO NOT touch any chemicals, clean immediately and avoid the chemicals entering the sewer or water course.
- After rescue or recovery it is important that any high voltage components or batteries are correctly handled and disposed of. Please seek advice from an MG Authorised Repairer.

Fire Extinguisher

Any fire extinguishers should be individually purchased by the owner, checked and replaced regularly as advised by the fire extinguisher manufacturer. It is recommended to use carbon dioxide fire extinguisher or ABC dry powder fire extinguisher.



If the vehicle is on fire and the fire is small, the fire extinguisher can be used to extinguish the fire (refer to the instructions for using the extinguisher).

Note: When using the fire extinguisher, pay attention to avoid direct skin contact and possible freezing/frostbite.

EMERGENCY RESCUE

Waterlogged Vehicle

The electric vehicle does not create any greater risk to life when immersed in water than a conventional vehicle. During cases of rescue when the vehicle is immersed in water, rescue personnel must use the correct insulated personal protective equipment and insulated tools.

- The driver, passengers and irrelevant personnel must be evacuated from the vehicle immediately.
- During the rescue process avoid touching the metal charged conductor of the damaged high-voltage parts to prevent possible electric shock injury.
- If there is no hissing sound or foam being emitted by the high voltage battery pack, the vehicle can be salvaged by professional organizations.
- After recovery from deep or flood water the vehicle high voltage system must be isolated and placed in an open place for isolation.
- When recovering vehicles, it is not allowed to tow them directly. Suitable recovery vehicles must be used for transportation.
- After rescue or recovery it is important that any high voltage components or batteries are correctly handled

and disposed of. Please seek advice from an MG Authorised Repairer.


Cutting



No matter what disable procedure is used, care should always be taken with all high-voltage components to avoid possible power-on risks, cutting, squeezing or touching high voltage components may cause serious injury or death.

Please use an appropriate tool to cut the vehicle, such as hydraulic cutter, always wear appropriate personal protective equipment, otherwise serious personal injury or death may occur.

- High voltage, gas canisters, gas spring, supplementary restraint system (SRS) and other components are defined as non-cutting areas (red circle area in the figure). Do not cut or squeeze these areas, this may cause serious injury or death. High voltage components can be cut only after the high voltage system is isolated, except for high-voltage battery pack.
- In order to protect the passengers in the collision, some areas are reinforced with ultra high strength steel, these areas can be cut or squeezed with appropriate tools (cyan area in the figure).

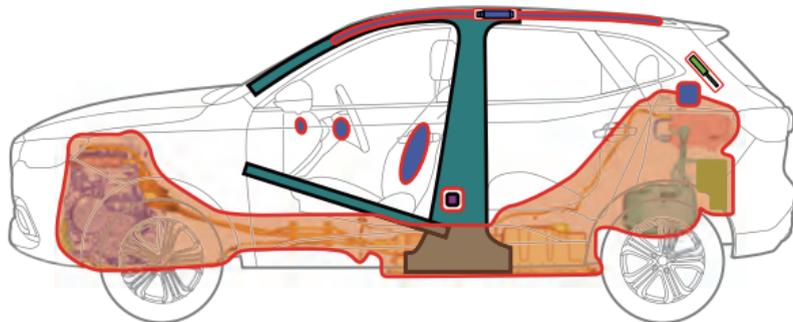

■ ULTRA HIGH STRENGTH STEEL
□ NO-CUT ZONES


EMERGENCY RESCUE

Jacking Or Lifting



When jacking or lifting the vehicle take extra care to not damage the high-voltage battery pack. When using rescue tools, pay special attention to ensure that the floor is not damaged.

The high voltage battery pack is located on the bottom of the vehicle. When Jacking or stabilizing the vehicle, only use the designated lifting area (shown in green) and make sure that there is no contact with the high-voltage battery pack (shown in orange area) or other high-voltage components.

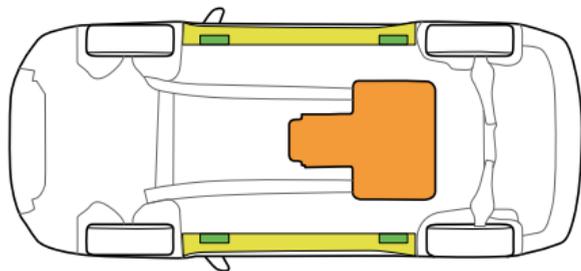


-  举升位置
Lifting Position
-  高压电池包
Battery Location

Vehicle Recovery after Accident

After an accident, vehicle recovery advice is as follows:

Transporter or Trailer




To transport the vehicle on a transporter or trailer, fit wheel chocks (1) as shown, then position the anti slip rubber blocks (2) around the circumference of the wheel. Meanwhile, fit the lashing straps (3) around the wheels and secure them on the trailer. Fasten the straps to secure the vehicle.

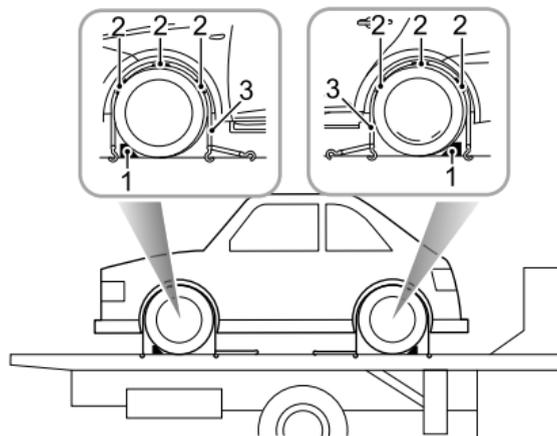

In cases where the vehicle breaks down or encounters an accident, you can use the towing hook to tow your vehicle, such as towing your vehicle onto the transporter. But they are not designed for towing other vehicles. The vehicle can be towed by using a soft rope, but a hard rod is recommended. Please consult the Owner's Handbook for detailed instructions.

Suspended towing is the best method for a vehicle that needs to be towed. The driven wheels **MUST** be suspended above the ground, this is to avoid any damage to the drive components and possible inadvertent powering of the vehicle. Ensure the EPB is released, the hazard lamps are ON and no passengers are in the vehicle.

EMERGENCY RESCUE

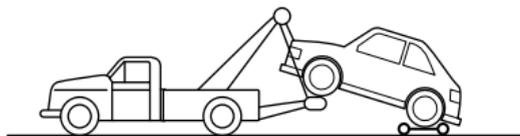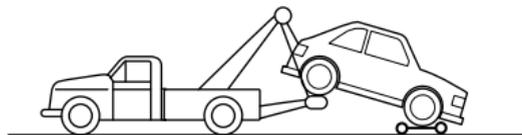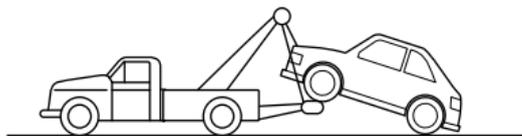


Precautions on Vehicle Towing

IMPORTANT

- The vehicle can be towed from the site only when there is no safety risk. If the battery pack is deformed, leaks, smokes, etc., the safety risk should be solved first.
- When using a transporter to ship the vehicle always ensure the parking brake is applied.
- Before towing the vehicle, release the parking brake, switch on the hazard warning lamps, close all doors and lock the vehicle.
- When towing, **DO NOT** suddenly accelerate or brake suddenly, this can cause accidents.
- Personnel are prohibited from staying in the vehicle when towing and shipping the vehicle.

Parking Operations

After the vehicle has been pulled over, the vehicle power system can be switched off by following the instructions below:

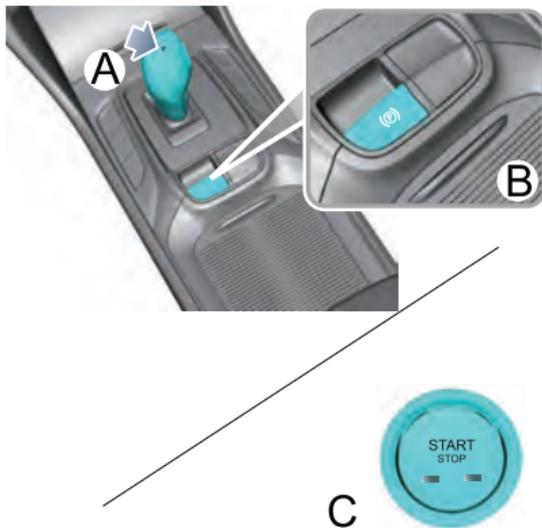

- 1 After bringing the car to a stop, ALWAYS apply the parking brake.
- 2 Ensure P is selected (A).
- 3 Make sure the EPB is applied. (B).

Note: *Selecting P using the shift lever will automatically apply the EPB, if the EPB fails to automatically apply, pull the EPB switch (located in the centre console) upwards until the indicator lamp in the switch illuminates to manually apply the EPB.*

- 4 Press the START/STOP Switch (C) to shut down the power system. (After switching off the power system, the LED's in the START/STOP switch will both be OFF.)

EMERGENCY RESCUE

Emergency Tailgate Opening Device

Tailgate Emergency Open

In cases where the doors on both sides cannot be opened, you still can leave the vehicle through the tailgate.



An emergency tailgate opening mechanism is located on the catch and can be accessed via a bespoke access point.

Fold down the rear seat squabs, locate the access point blanking cap, using your hand, pull the clip to release the cover.

Insert a suitable tool into the opening slot and release the tailgate lock from inside.

Vehicle Information



Item, Units	Excite	Exclusive
Overall length , mm	4574	
Overall width , mm	1876	
Overall height (unladen), mm	1664 (with body) 1685(with shake fin)	
Person in cab, person	5	
Unladen vehicle weight (kerb), kg	1737	1775

Item, Units	Excite	Exclusive
Gross vehicle weight, kg	2196	2196
Fuel tank capacity , L	37	
Fuel type	Gasoline	

Note: Vehicle length not including the license plate.

Note: Rearview mirrors and the deformed portion of tyre wall directly above the touchdown point are not included in the total width.

VEHICLE DATA

Parameters of High Voltage Battery

Item		Parameter Values
Battery Cell	Type	Ternary lithium ion battery
	Rated Voltage, V	3.62
	Rated Capacity , Ah	51
Battery Pack	Number of Battery Pack	1
	Battery Pack Dimension , mm	1162*998*264
	Voltage Range	252–376.2
	Rated Capacity , Ah	51
	Rated Voltage, V	326
	Weight, kg	139
	Waterproof Grade	IP67